



MCERTS MSFM

HIGHLY ACCURATE FLOW MONITORING WITH
MCERTS ACCREDITATION

MAXIMISE FLOW ACCURACY WITH THE MCERTS MSFM FLOW METER -
A HIGHLY ACCURATE ULTRASONIC AREA VELOCITY FLOW METER FOR OPEN CHANNEL MONITORING AND PART FILLED PIPES.

THE **MCERTS MSFM FLOW METER** IS A SELF-CONTAINED, BATTERY-POWERED, INSERTION MULTI-SENSOR MONITOR AND IS **CERTIFIED** TO DELIVER GUARANTEED FLOW MEASUREMENT ACCURACY FOR SITES WHICH REQUIRE VERIFICATION BY **MCERTS INSPECTORS**.

PORTABLE ULTRASONIC AV FLOW METER WITH MCERTS ACCREDITATION

The **MCERTS MSFM** is accredited by the Environment Agency and is the ideal monitoring system for any business, industry or water company that falls within the Environmental Permitting Regulations (EPR).


It enables companies to understand exactly what is happening with their agreed consented discharge at any given time and permits water companies to **precisely monitor** pump station emergency overflow and wastewater treatment works final discharge.

It can also be employed in clean water reservoirs.



MULTI-SENSOR TECHNOLOGY FOR IMPROVED ACCURACY

Using the velocity, depth and temperature to determine the flow rate ensures a **more accurate reading** that doesn't require weirs or flumes and **automatically adapts to changes** in production and intense weather that can affect the flow rates.

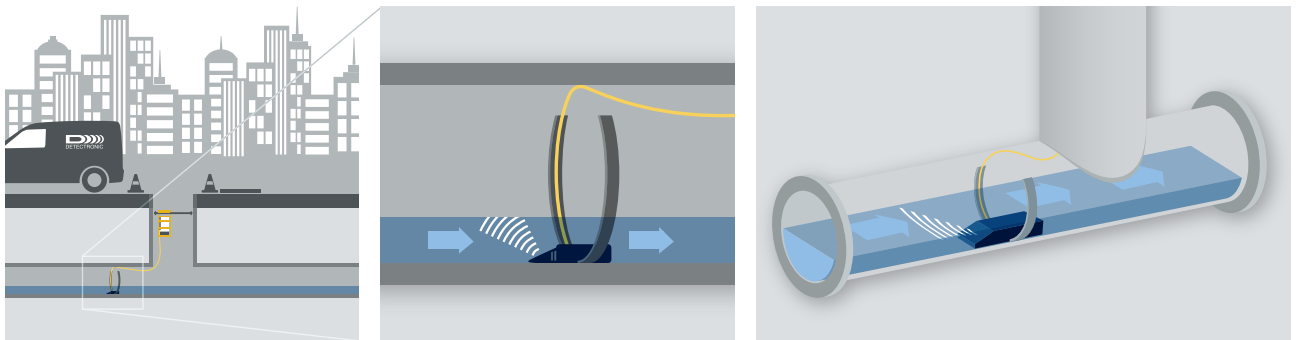

THE MCERTS MSFM IS IDEAL FOR...



WASTEWATER
MONITORING



EFFLUENT
MONITORING



ENVIRONMENTAL
PERMIT REGULATIONS



INFLOW &
INFILTRATION



POLLUTION CONTROL



FLOOD
PREVENTION



TREATMENT WORKS
COMPLIANCE



DISCHARGE
MANAGEMENT

BATTERY POWERED

The **MCERTS MSFM** is battery-powered, making it perfect for installations that have no mains power available, such as remote sites.

The **MCERTS MSFM** battery has a life expectancy of **5 years**.



DATA SCREENING

Detectronic's dedicated **DATA CENTRE** monitors your network and uses your data to detect blockages **before** they cause flooding and pollution.

- Real-time data collection and monitoring helps you better understand your sewer network.
- Using human Intelligence means you only receive validated intervention reports.
- Site data, MET office data and local environmental data is integrated for every site.
- Compatible with data from any make of telemetered monitors.

PRODUCT SPECIFICATION

VELOCITY SENSOR

Type: dual piezoelectric elements.
Range: 0.03m/s to 4.00m/s (resolution 1mm/s).
Linearity: $\pm 1\%$.
Accuracy: $\pm 2.5\%$ FS
($\pm 1\%$ in calibrated range 0.05m/s - 2.00m/s).

DEPTH SENSOR

Type: hydrostatic pressure.
Range: 0.0m to 3.5m (resolution 1.0mm).
Linearity: 0.1% BSL.
Accuracy: $\pm 0.2\%$ FS
($\pm 0.1\%$ in calibrated range 0.03m - 2.00m).

TEMPERATURE SENSOR

Type: Current Derived Resistance Bridge
Range: 0°C to 50°C.
Accuracy: $\pm 1^\circ\text{C}$.

OPTIONAL (ULTRASONIC) LIDOTT® LEVEL SENSOR

Type: Piezo-ceramic, temperature-compensated
Range: 0.000 - 1.500m
Accuracy: +/- 2mm

MCERTS CERTIFIED RANGE

0 to 30l/s for 197mm channel.
0 to 20l/s for 152mm pipe.
0 to 25l/s for 188mm pipe.
0 to 30l/s for 244mm pipe.
Certificate number: Sira MC180336/03.

DATA LOGGER

Memory: solid state 512k-max 60k per channel (rotating store or store until full).
Recording interval: programmable 1 - 60 minutes.
2G/LTE-M/NB-IoT GPRS communication worldwide compatibility.
Data transmission: 2G/LTE-M/NB-IoT GPRS - 15 minutes, hourly, daily, weekly, monthly at programmable intervals.
Logger power supply: 5 years typical life span internal lithium battery pack (user replaceable).

MAIN SENSOR POWER SUPPLY AND OPERATING CAPACITY

Type: 12V ATEX Li-ion rechargeable battery pack.
Battery life: Full Charge = 30+ weeks at 5 minute logging rate.

ENVIRONMENTAL

Operating temperature: -20°C to +60°C.
Protection: IP68/NEMA6P.
Connectors: IP68 Mil - Spec.
Dimensions: 530 x 213 x 150 (maximum), including battery pack and protection frame.
Weight: 8.5kg (including battery pack, frame, depth and velocity sensors with standard 10m cables).

APPROVALS

Sira 19ATEX2255X
II 1G Ex ia IIB T4 Ga Ta = -40°C to +60°C
IECEX SIR 19.0078X

Detectronic Limited

Regent Street
Whitewalls Industrial Estate
Colne
Lancashire BB8 8LJ
United Kingdom

+44 (0)1282 449 124
sales@detectronic.org
www.detectronic.org

